


STANDARD DETAILS


CITY OF SHERWOOD ARKANSAS

TITLE RESIDENTIAL DRIVEWAY

DETAILS

	STD-30
Issue Date	Revision Date
January, 2007	
	-

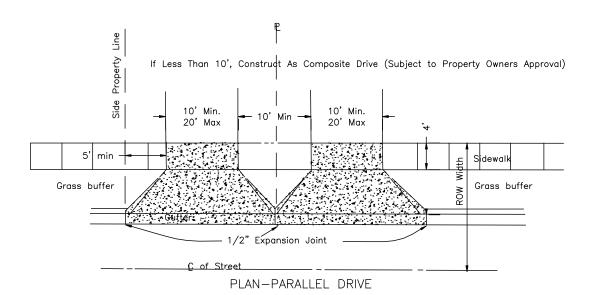

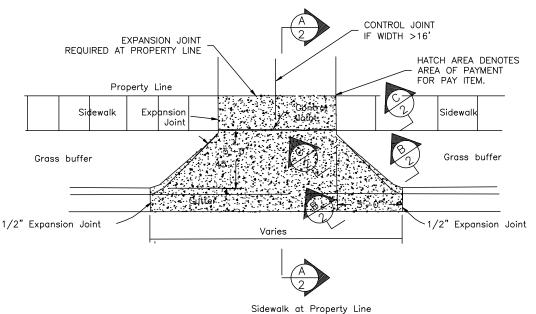

NOTE

- 1. CONTROL JOINTS REQUIRED IN ALL DRIVEWAYS AT 12'-0" O.C. EACH WAY OR SPACED EQUAL TO THE WIDTH OF DRIVEWAY WHICHEVER IS LESS.
- 2. SECTIONS ARE ON PW-31.
- GRASS BUFFER TO BE 5' WIDE UNLESS APPROVED BY CITY TO BE MODIFIED. GRASS BUFFER MAY BE REDUCED TO MINIMUM 36" WITH CITY APPROVAL.
- 4. DRIVEWAY GRADES SHALL BE DESIGNED BY ENGINEER TO KEEP STORMWATER IN STREET, 2% MINIMUM SLOPE AT SIDEWALK CROSSING, MAXIMUM % OF GRADE CHANGE IS 16.